BSLBATT®

Best Solution Lithium Battery

Energipak 3840

High-power portable power supply

3840Wh

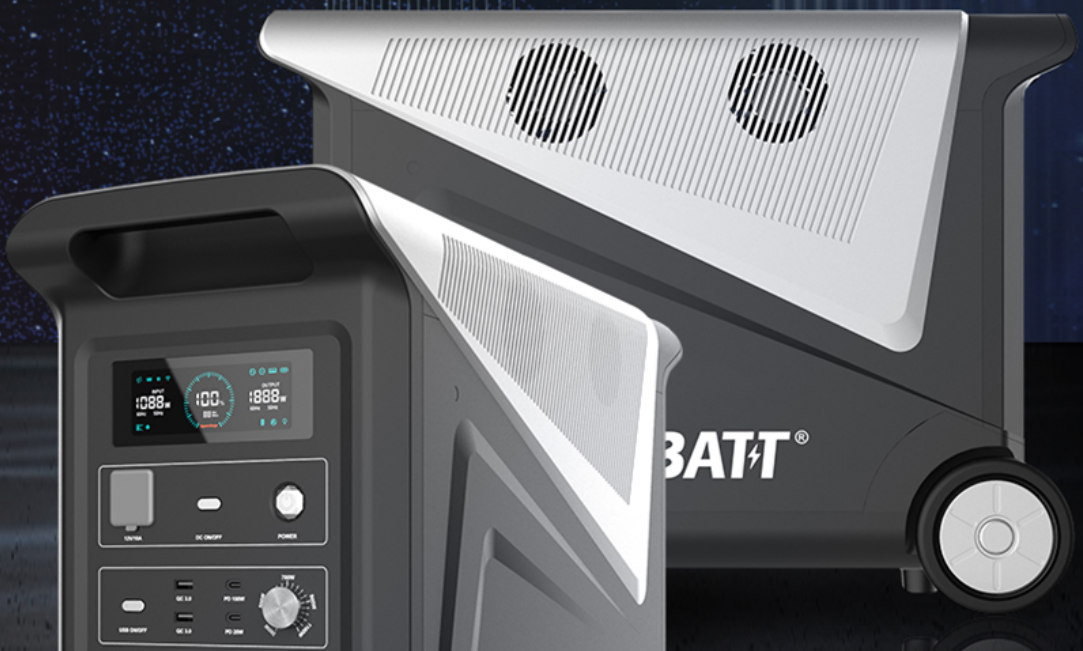

BSLBATT
www.bsl-battery.com

Huge Capacity

3840Wh

Rated Power

3600W

Life Cycles

4000+

Built-in LiFePo4 Battery



AC Fast Charging

0%-100% Takes

3 Hours

UPS
Seamless
Switchover Time < 10ms

OEM/ODM Services

2000W Max Solar Charging

12V/10A
DC ON/OFF
POWER
USB ON/OFF
QC 3.0
PD 100W
PD 20W

10 Output Ports

Specifications

Model No.	Energipak 3840	**Capacity**	3840Wh
Battery Spec	EVE Brand LiFePo4 Battery #40135	**Battery Cycles Life**	4000+
Dimensions & Weight	630*313*467 mm 40 KGs	**AC Charging Time**	3Hours (1500W Input Power)
USB Output	QC 3.0 *2 (USB-A) PD 30W*1 (Type-C) PD 100W*1 (Type-C)	**Charging Modes**	AC Charging Solar Charging(MPPT) Car Charging
AC Output	3300W Max (JP Standard) 3600W Max (USA & EU Standard)	**Input Power**	Adjustable by Knob 300W/600W/900W/1200W/1500W
LED Light	3W*1	**UPS Mode**	Switchover Time < 10ms
Cigar Output	12V/10A *1	**Working Temperature**	-10℃ ~ 45℃

Product Dimension and Accessories

3600W Portable Power Station


464mm
321mm
550mm(Wheels' not included)
BSLBATT

AC Charging Cable

User Manual

Portable Power Station
User Manual

XT90 to MC4 Cable

XT90 to Car Charging Cable

Introduction of Ports

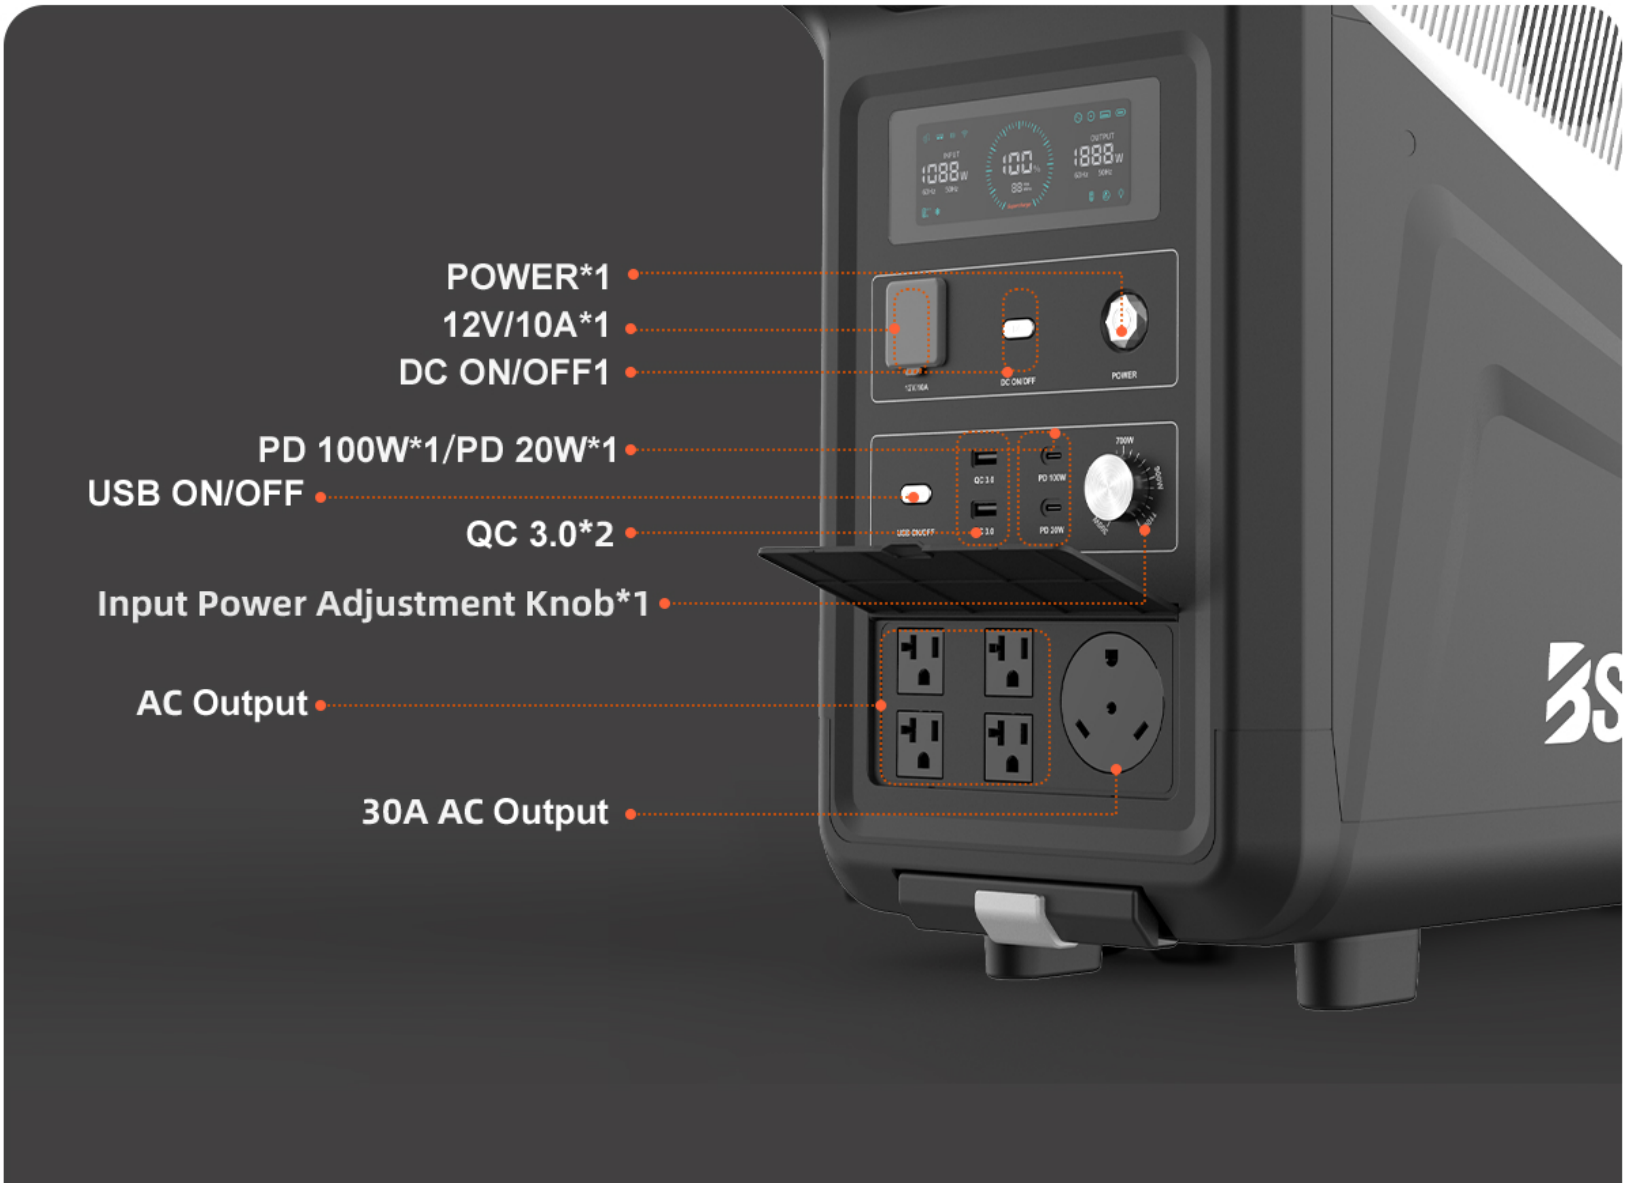
POWER*1
12V/10A*1
DC ON/OFF1
PD 100W*1/PD 20W*1
USB ON/OFF
QC 3.0*2
Input Power Adjustment Knob*1
AC Output
30A AC Output

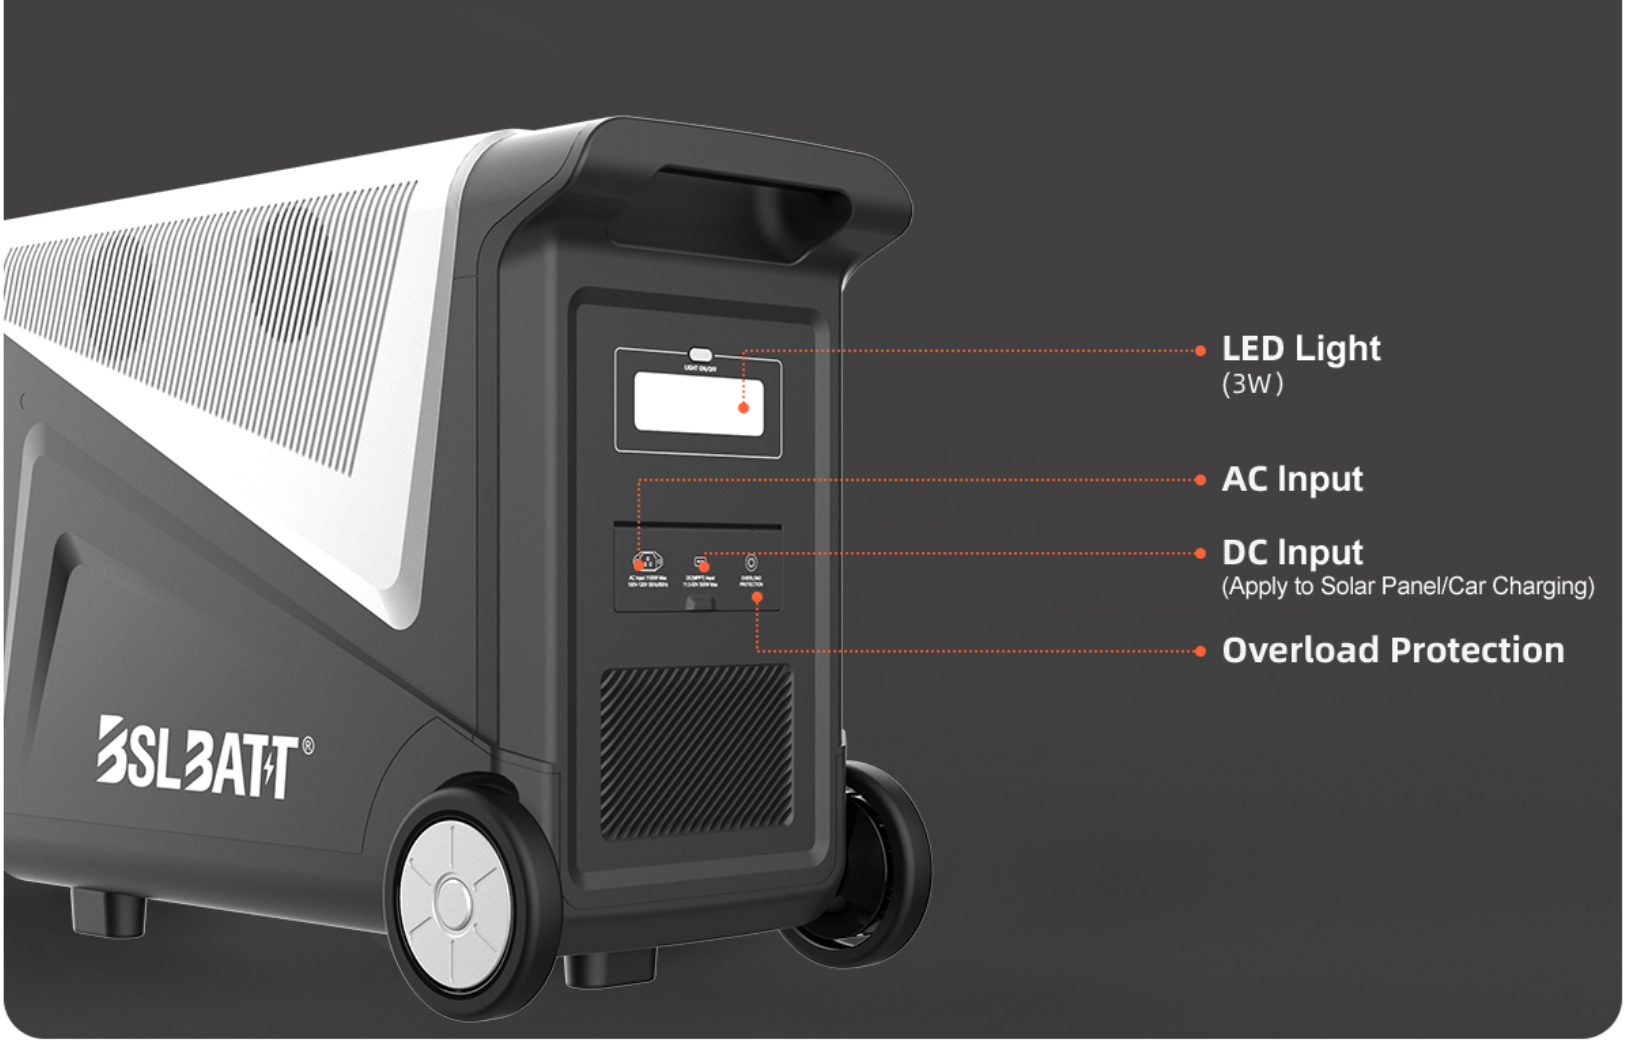

LED Light
(3W)

AC Input

DC Input
(Apply to Solar Panel/Car Charging)

Overload Protection

Product Details

Solid Draw-bar, Adjustable Length

Smart HD Screen


INPUT
8888W
60Hz 50Hz
188%
88 Hrs Mins
Supercharge
OUTPUT
8888W
60Hz 50Hz
PURE SINE-WAVE

Adjustable Input Power Knob

Fireproof Shell of level 94V-0

900W
1200W
1500W
300W
600W
Input Regulator
BSLBATT

High-class Dust-Anti Rubber Plug

3W High Bright LED Light

Charging Modes

AC Charging

Adopt Super Fast Charging Technology

Battery Level from 0% to 100% within 3 Hours

5–6 Times Faster Charging Speed than Peer Products.



Adjustable Input Power

(300W/600W/900W/1200W/1500W)

Apply to Low Power Limited Scenarios,
Get Charging Everywhere without Limit.

900W
600W
1200W
300W
1500W
Input Regulator
USB ON/OFF
QC 3.0
AC ON/OFF

PURE SINE-WAVE
AC Output:100V-120V 50Hz/60Hz
Rated 3600W Total

Car Charging

Solar Panel Charging

Main Features

Bi-directional High Power Input & Output
3300W Constant Current Power Supply

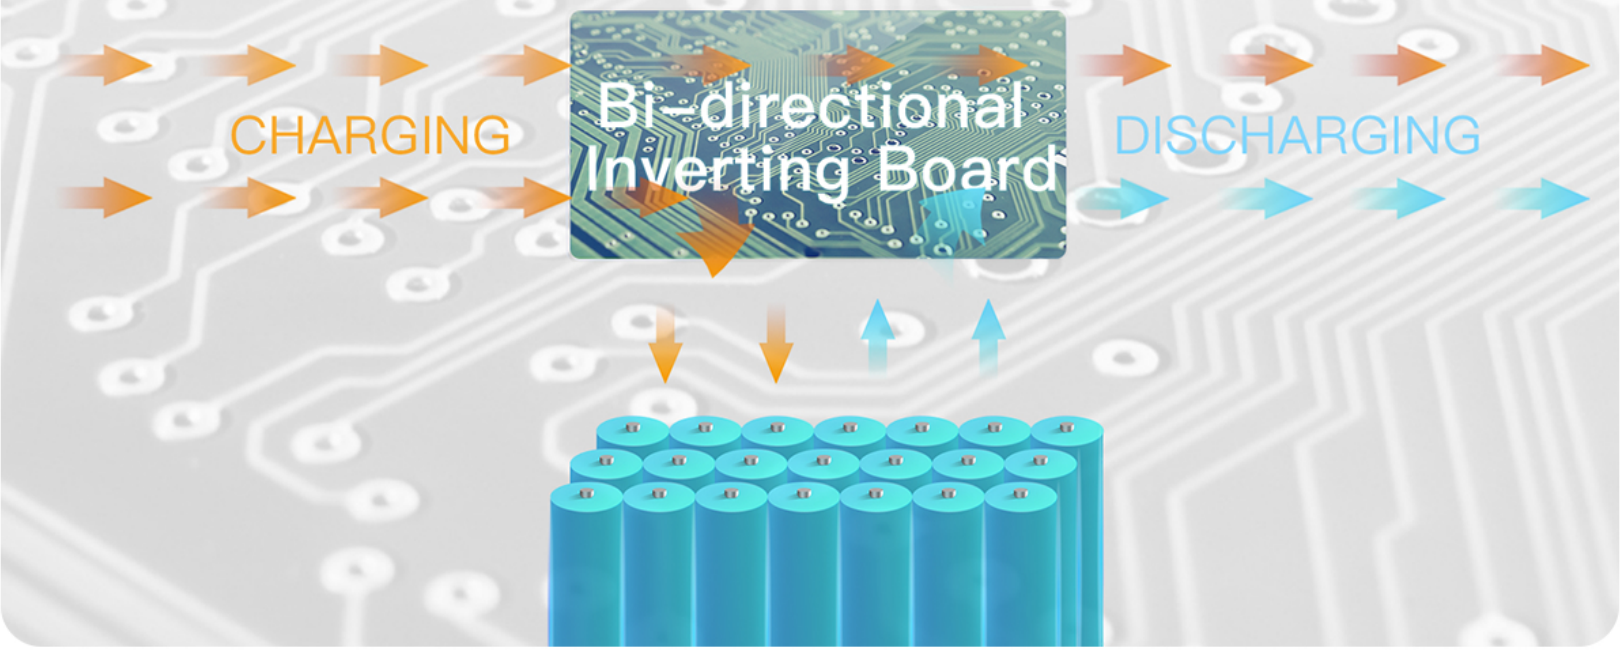
CHARGING
Bi-directional Inverting Board
DISCHARGING

Uninterrupted Power Supply

Seamless Switchover Time in Under 10ms

Protect your essential electronic devices in case of sudden power outage.

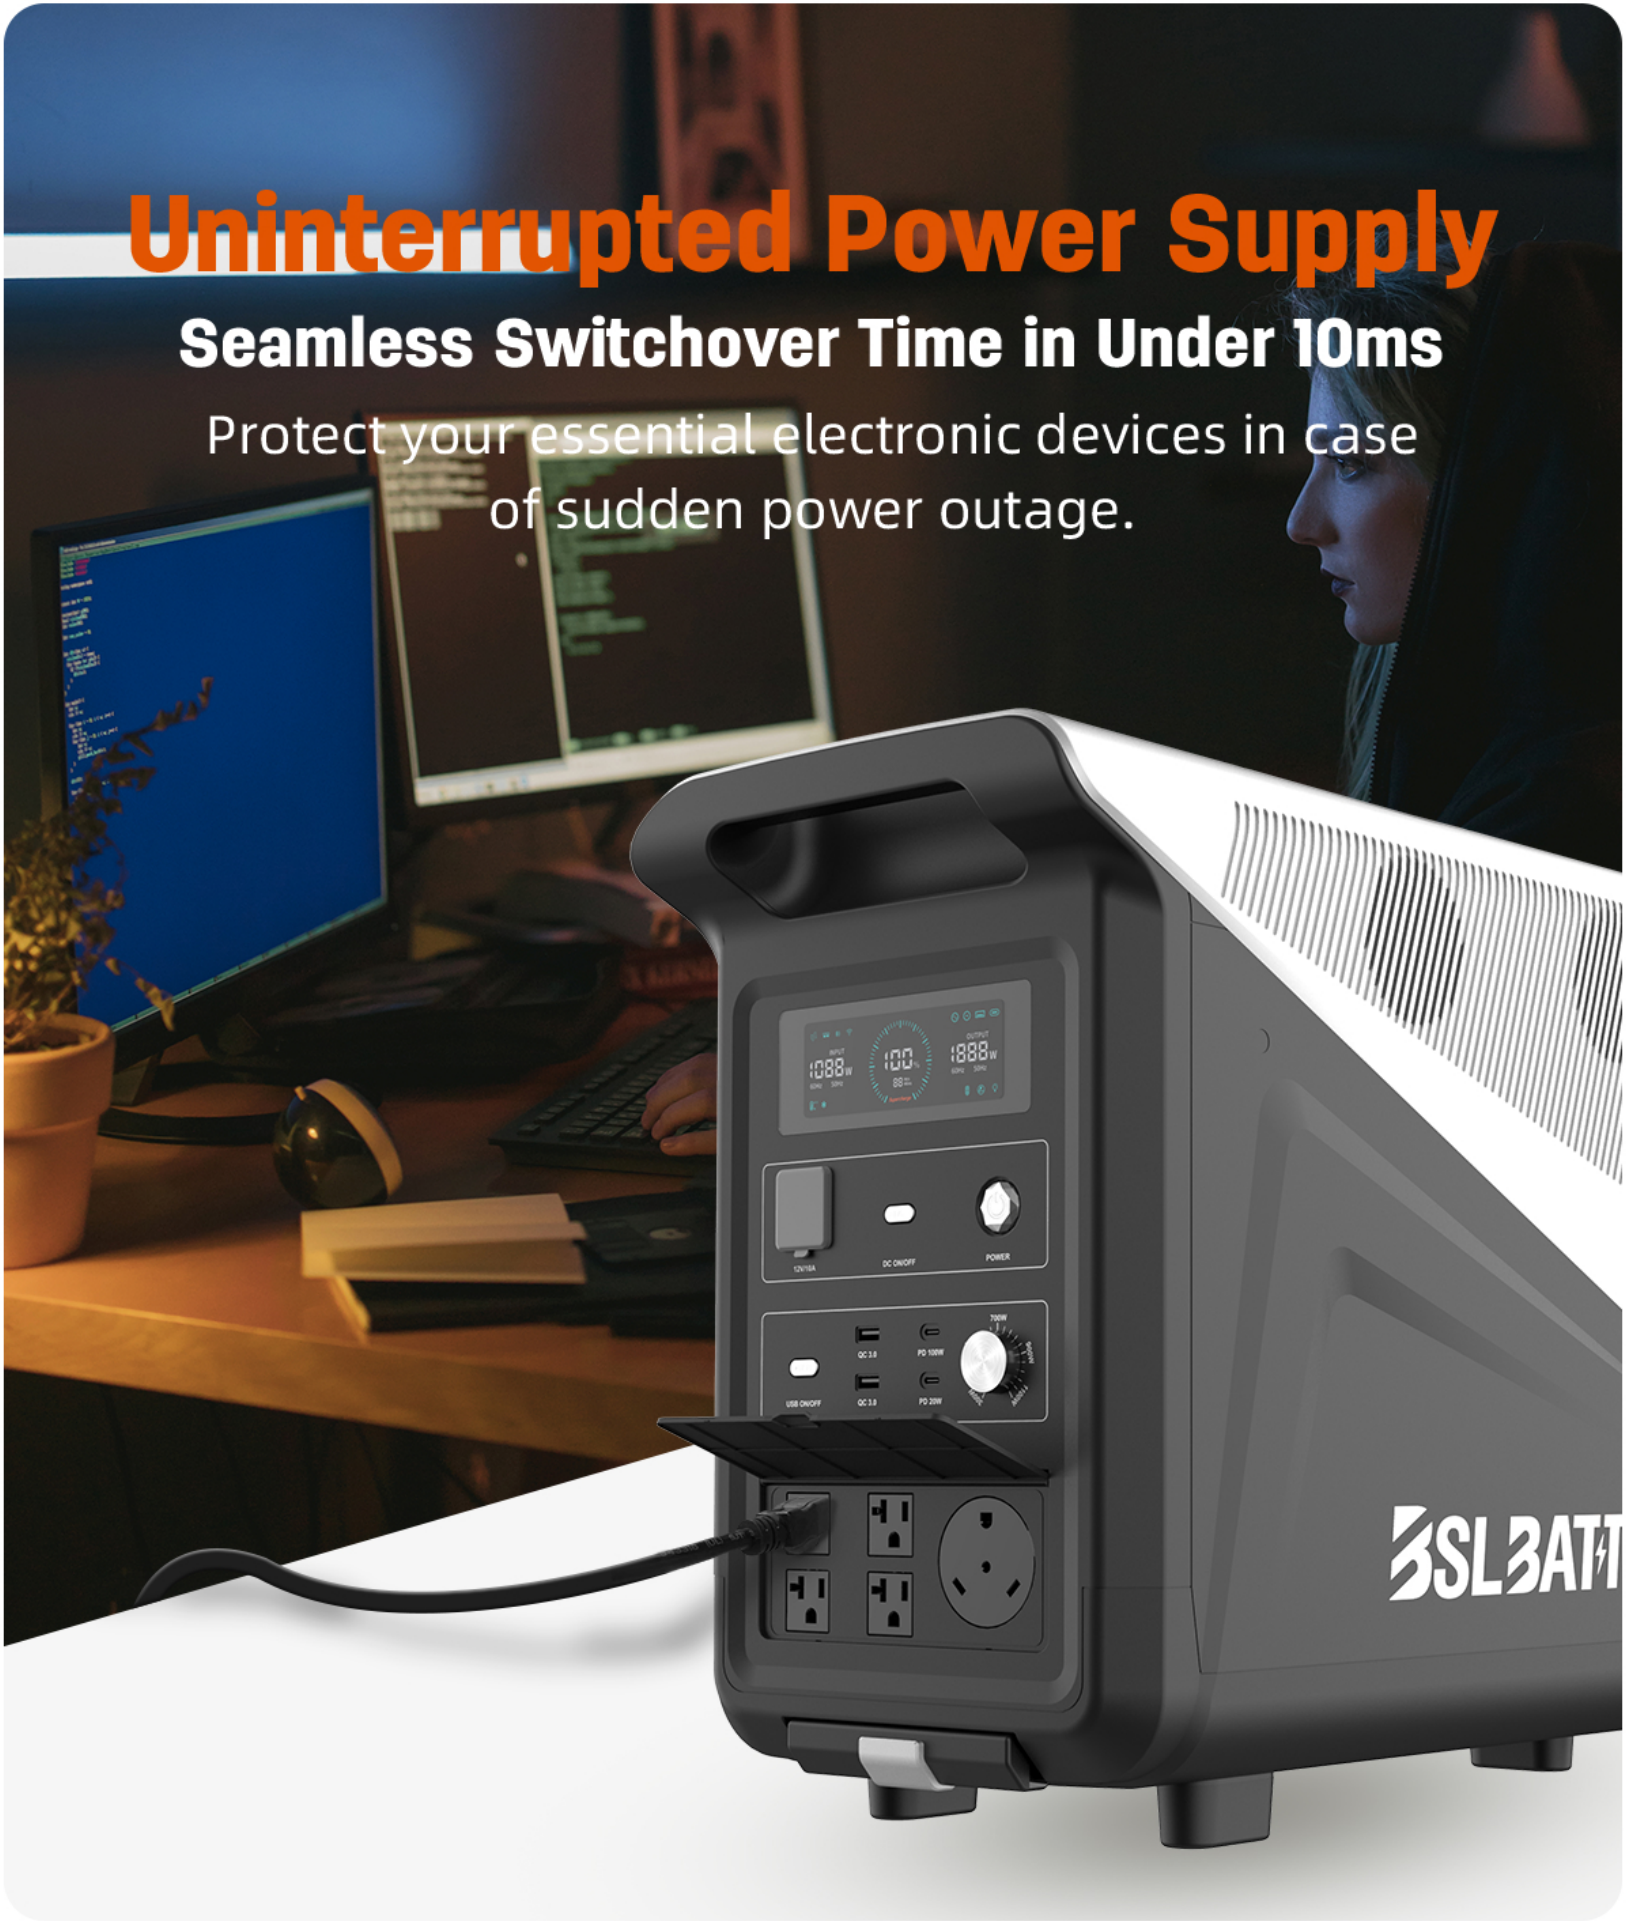

High Quality Car-grade Battery

Long Battery Life

Real Capacity

High Safety Security

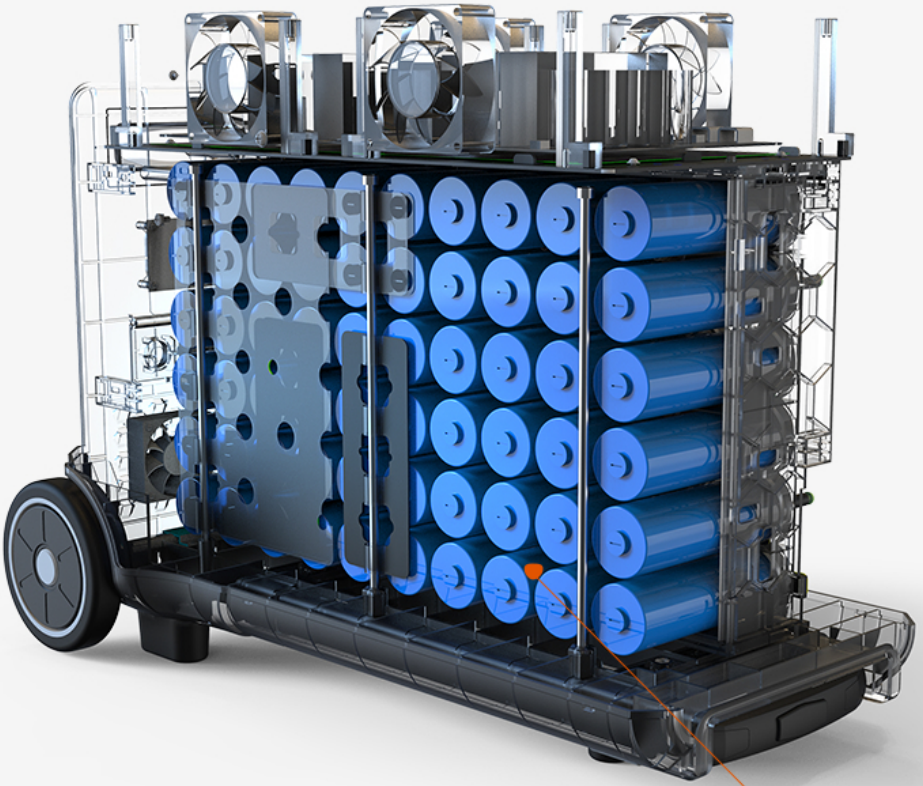

#40135 LiFePo4 Battery Cell
(EVE Brand)

Battery Management System



Pure Sine Wave Inverter



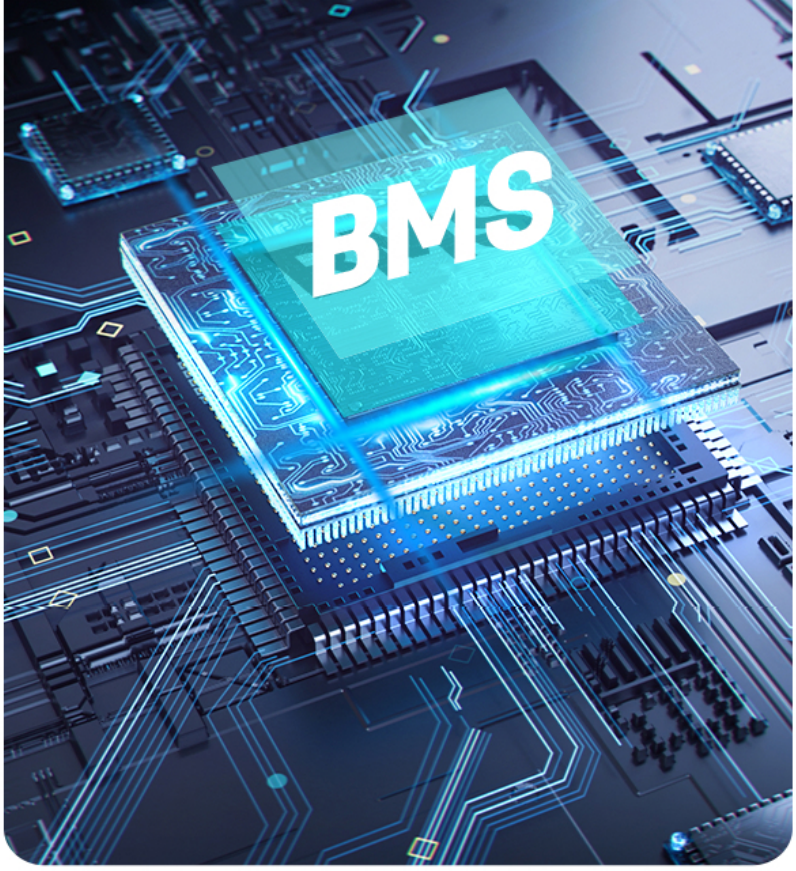

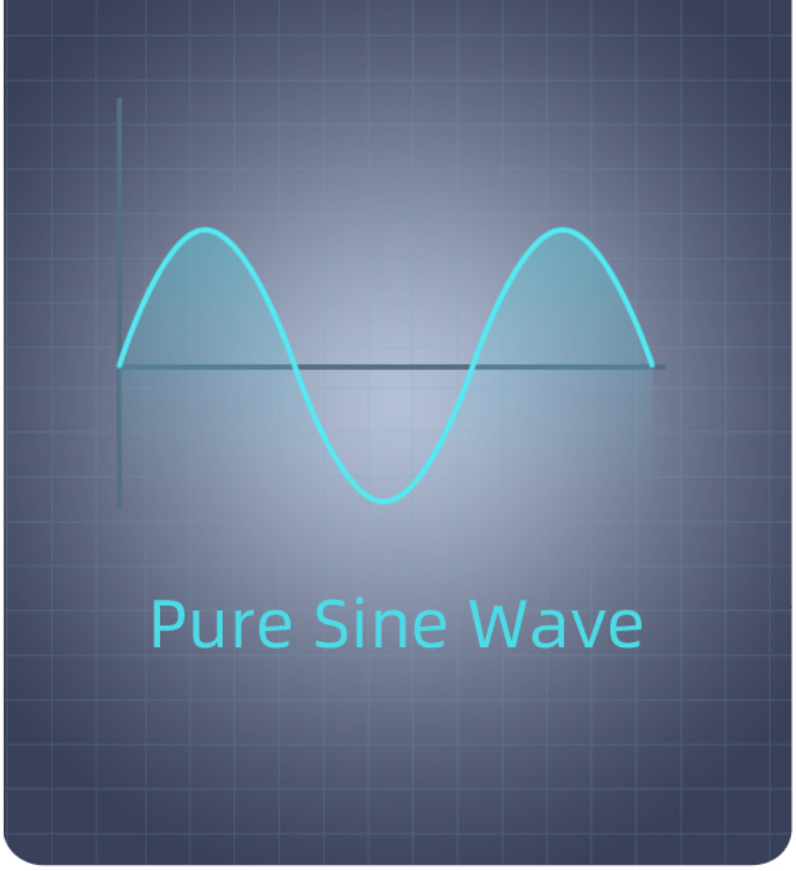
Pure Sine Wave

Apply to Various Outdoor Equipment and Devices

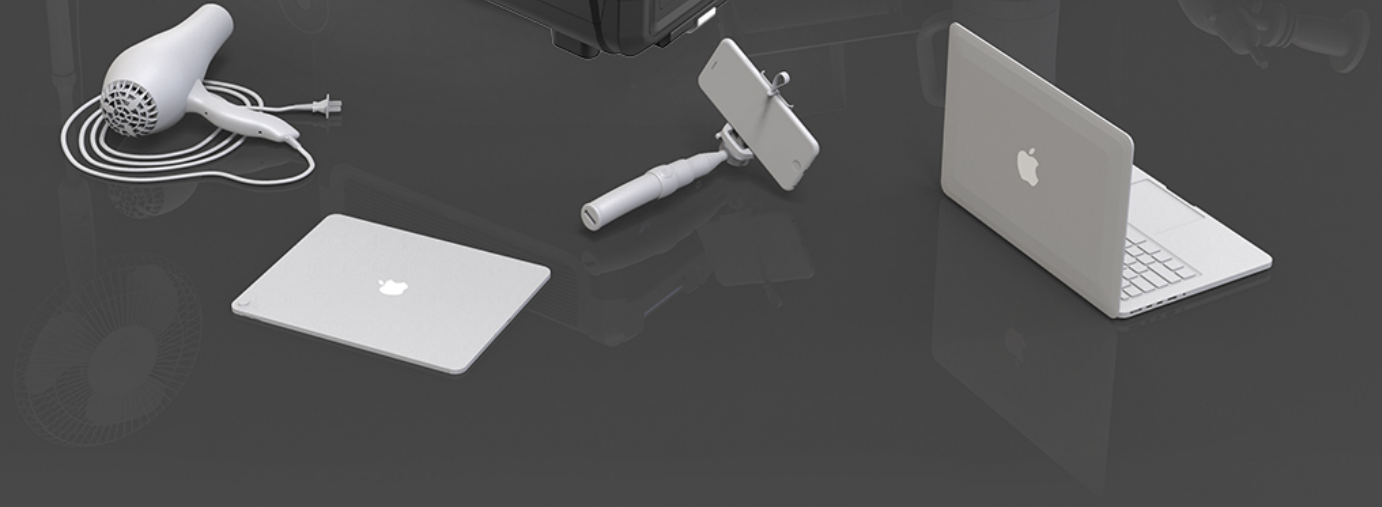

3.8H
Juice Extractor

25.6H
Car Refrigerator

6.4H
Coffee Maker

38.4H
projector

533 Recharges
Camera

54 Recharges
MacBook 14

331 Recharges
Iphone 13

426 Recharges
Drone

Application Scenarios

Road Trip

Picnic Party

Outdoor Construction

Emergency Rescue

Power Independence

Emergency Backup